

VALIANT COMMUNICATIONS LIMITED



T1 Protection (Fail-Over) Switch Product Brochure & Data Sheet

INDIA

Valiant Communications Limited

71/1, Shivaji Marg, New Delhi - 110015, India
Phone: +91-11 4105 5601, +91-11 4105 5602,
+91-11 4105 5603, +91-11 2592 8415,
Fax: +91-11 4105 5604, +91-11 2543 4300
E-mail: getinfo@valiantcom.com
Website: <http://www.valiantcom.com>

U.K.

Valiant Communications (UK) Ltd

1, Acton Hill Mews, 310-328 Uxbridge Road,
London W3 9QN
United Kingdom
E-mail: uk@valiantcom.com
Website: <http://www.valiantcom.com>

U.S.A.

Valcomm Technologies Inc.

4000 Ponce de Leon, Suite 470
Coral Gables, FL 33146
United States of America
E-mail: fl@valiantcom.com
Website: <http://www.valiantcom.com>

U.A.E.

Valiant Communications FZE

P.O. Box No. 121523 SAIF Zone,
Sharjah,
U.A.E.
E-mail: uae@valiantcom.com
Website: <http://www.valiantcom.com>

INDEX

S. No.	Particulars	Pg. No.
1.	Product Overview	3
2.	Features	3
3.	Benefits	3
4.	Application Diagram	5
5.	Front View	6
6.	Technical Specifications	7
7.	Ordering Information	8
8.	Support	9




Product Overview

Valiant 4 Port T1 Protection (Fail-Over) Switch allows the user to connect upto four T1 lines from the telephone company to **"active"**, as well as to **"standby"** T1 terminal(s), such as data server(s), routers etc. at the customer. In the event of the failure of the routers / data server(s) / equipment connected to the **"A / active"** ports, the T1 Protection (Fail-Over) Switch shall automatically switch and connect the T1 line(s) from the telephone company to the routers /data server(s) / equipment connected to **"B / standby"** ports. This ensures minimum downtime-that would have otherwise occurred due to equipment failure. premises.



T1 Protection (Fail-Over) Switch

Application Diagram

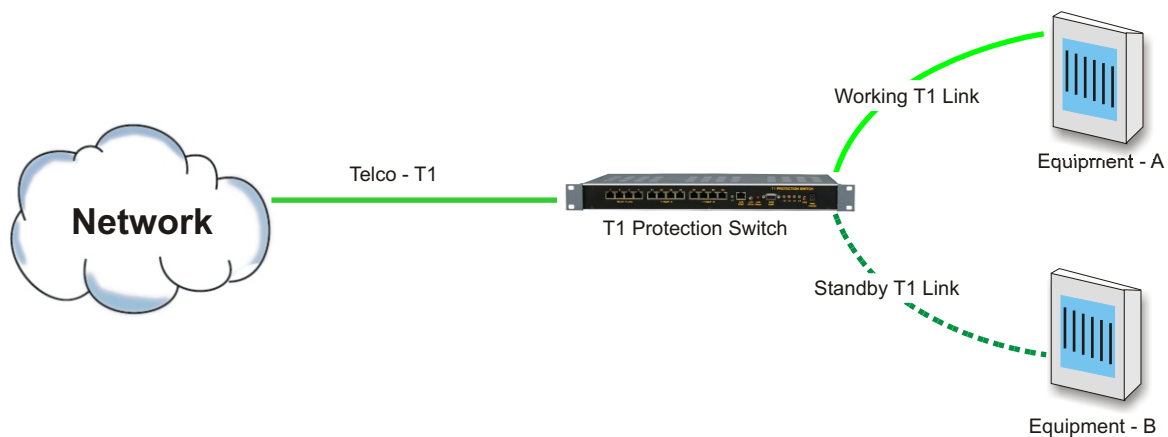

Features

- Allows the users to connect upto 4 T1 lines from the Telephone Company to 4 active and 4 standby T1 terminals
- User configurable. May be used for a single T1 link and scaled upto 4 T1 links though user configuration
- Independent, user configurable switching parameters for each T1 link
- Built-in real-time clock / real-time logging maintains a history of all events
- Remotely accessible over a TCP-IP networks. Allows the user to access and carry out maintenance, or and T1 switch the links remotely, if required.

Benefits

- Allows the users to create and maintain active/standby/duplicate customer premises data networks/data servers, without requiring to bear the recurring \$\$\$ expense of leasing additional expensive T1s lines from the telephone company
- Automatically switches the T1 link(s) from the Telephone Company between the **"active"** and **"standby"** T1 equipment at the customer premises, according to the customer-defined criterion

Benefits


- Improves security. Allows the user to co-locate the "backup"/" standby" equipment in a different room/building and prevent data loss
- User programmable switching criterion independent for each T1 link
- Increases the reliability of the customer data/IT networks without the recurring additional cost of leasing additional T1 lines from the telephone company. The equipment may be used to create secondary/backup systems at the customer premises to provide virtually uninterrupted service.

User programmable criterion for switching between Active and Standby E1 Links at the customers premises:


Loss Of T1 Signal (LOS)	<p>The Loss of Signal condition in a T1 may occur due to:</p> <p>a) The failure of the T1 Port of the customer premises equipment.</p> <p>b) Or due to loss of power to the customer premises equipment.</p> <p>c) Or due to the disconnection of the T1 cable between the protection Switch and the T1 Port of the customer premises Equipment.</p> <p>The cause of LOF is 2 out of 5 Ft bits are in error for D4 Framing and 2 out of 5 frame bits are in error for ESF framing.</p>
Loss Of Frame (LOF)	<p>This Alarm is also known as Blue Alarm. This Alarm indicates unframed all ones being detected in the incoming signal on the receiver of T1 Protection Switch.</p>
Alarm Indication Signal (AIS)	<p>This Alarm is also known as Yellow Alarm. This Alarm indicates in D4 Framed bit 2 of each DS0 for 255 consecutive channels has been detected as a zero.</p>
Remote Alarm (RA)	<p>When ESF Framed: Alternating eight ones/eight zeros have been detected in the ESF Datalink. A Yellow Alarm is typically transmitted to indicate a failure on the receive side of the Failed end.</p>
CRC ERROR	<p>This parameter is the number of CRC-6 errors (Cyclic Redundancy check errors) that occurred during the test period.</p> <p>CRC-6 errors are only counted while the Telco T1 framing is selected as ESF (External Superframe).The CRC-6 can be monitored either on-in-service or Out-of-Service T1 spans. Since the expected value of the CRC pattern can be anticipated, the received data can be compared to the expected results. Whenever the expected value does not equal the actual value a CRC error event is counted.</p>
Switching Time	<p>Change over time from main port to standby port is user configurable from 10 ms to 3000 ms.</p> <p>Recovery time from standby to main port is also user configurable from 10 sec to 1000 sec.</p>

Application Diagram


Telco T1 link connected to Equipment-A

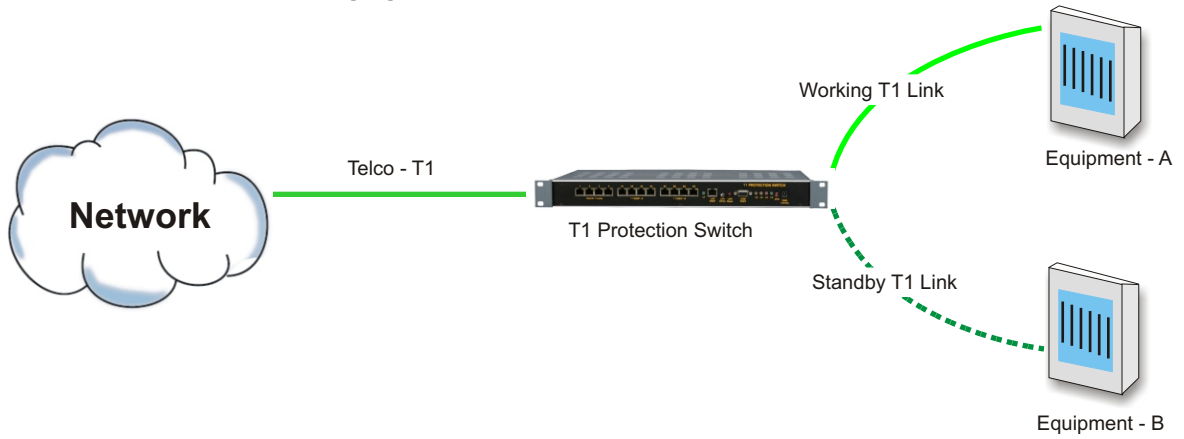

Equipment-A fails - Telco T1 automatically switches to Equipment-B

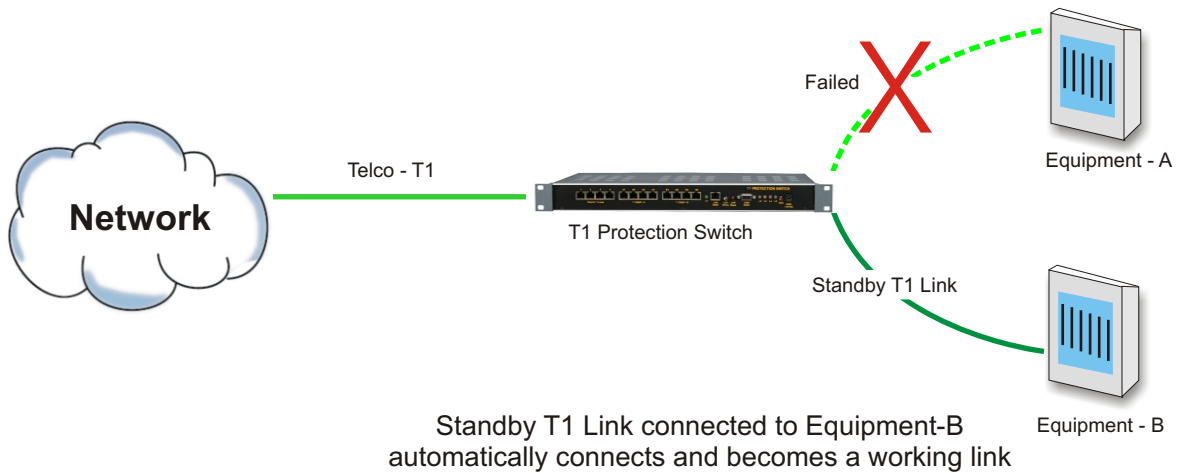

Equipment-A recovers - Telco T1 automatically switches to Equipment-A

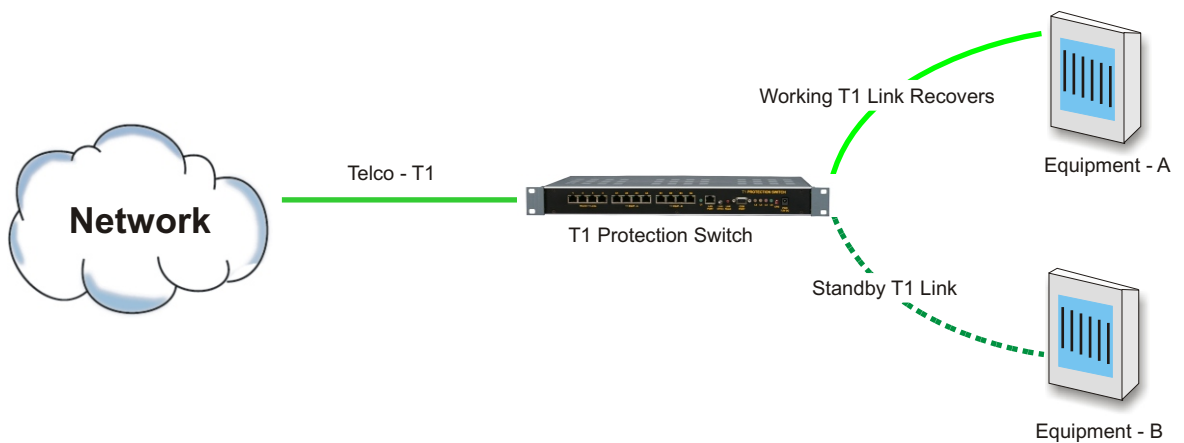


T1 Protection (Fail-Over) Switch

Shelf Description

The T1 Protection (Fail-Over) Switch is fitted in a 19-inch 1U shelf that provides access to all external interfaces.

The T1 interfaces, power input and access and Management Ports (RS232) and 10BaseT Ethernet interfaces) are accessible from the front panel.

Front view of the shelf

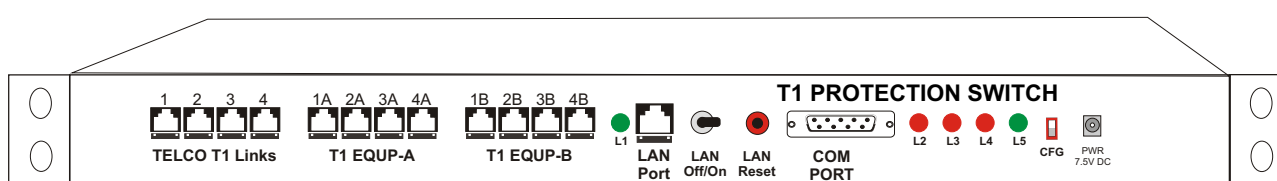

T1 Protection (Fail-Over) Switch LED Indications

The LEDs indicate the following:

- L1- (Green) LAN ON
- L2 - Equipment Port A "In Use" for at least one of the four (enabled) Links
- L3 - Equipment Port B "In Use" for at least one of the four (enabled) Links
- L4 - (Red) Self test failure/Hardware failure
- L5 - (Green) + 5 V DC (internal power supply)

Mechanical Specifications

Rack mounting	Standard 19-Inch. DIN Rack
Height	44.00 mm.
Depth	260.00 mm.
Width	477.00 mm.
Weight	4.00 kg.

Technical Specifications

Network Interface

Number of Interfaces	4 Telco T1 Links (common link/Telco T1s) 4 Active T1 Links (for Equipment-A) 4 Standby T1 Links (for Equipment-B)
Line Rate	T1 - 1.544 Mbps
Line Code	B8ZS, AMI (User Selectable)
Frame Structure	SF, ESF (User Selectable)
Bit Rate	1544 Kbps \pm 50 ppm
Jitter Tolerance	As per ITU-T G.823
Output Jitter	< 0.05 UI (in the frequency range of 20 Hz to 100 KHz)
Nominal Line Impedance	100 Ohms Balanced RJ-45
Nominal Pulse Width	244 ns
Pulse Mask	As per ITU (CCITT) Rec. G.703
Loss and recovery of frame alignment	As per clause 3 of ITU (CCITT) G.732
Loss and recovery of multiframe alignment	As per clause 5.2 of ITU (CCITT) G.732

AC Power Supply Specifications

Range of input of AC Adapter Voltage	100 V to 240 V AC, 50Hz / 60Hz.
System Input voltage	7.5 V DC to 9.0 V DC, DC input polarity protection.
Maximum full load output current	2.5 A at 7.5 V DC/9.0 V DC
Input voltage reversal protection	Provided in the Card
Efficiency at full load	>86%

Temperature

Operating	0°C to 50°C
Humidity	5% to 95% Non-Condensing

Management Ports (COM Port)

Serial Port: 9.6Kbps (Async). ASCII/VT100/HyperTerminal.
10BaseT Ethernet: Telnet

NMS (with Telnet) XPort Specifications

Network Interface	RJ-45 Ethernet 10BaseT or 100BaseT-TX (auto sensing)
Compatibility	Ethernet Version 2.0 IEEE802.3
Protocols Supported	ARP, UDP/IP, TCP/IP, Telnet, ICMP, SNMP, DHCP, BOOTP, TFTP, Auto IP, SMTP and HTTP
LEDs	10Base-T and 100Base-TX Activity, full/half duplex
Management	Internal web server, SNMP (read only), Serial login, Telnet login
EMI Compliance	<ul style="list-style-type: none"> - Radiated and conducted emissions - complies with Class B limits of EN55022:1998 - Direct and Indirect ESD - complies with EN55024:1998 - RF Electromagnetic Field Immunity - complies with EN55024:1998 - Electrical Fast Transient/Burst Immunity - complies with EN55024:1998 - Power Frequency Magnetic Field Immunity - complies with EN55024:1998 - RF Common Mode Conducted Susceptibility - complies with EN55024:1998

Command Language

Command Line Interface (English text commands)

Compliance/Regulatory

<ul style="list-style-type: none"> • EMC FCC Part 15 Class 2
<ul style="list-style-type: none"> • Operation ETS 300 019 Class 3.2
<ul style="list-style-type: none"> • Storage ETS 300 019 Class 1.2
<ul style="list-style-type: none"> • Transportation ETS 300 019 Class 2.3

Ordering Information

S. No.	Product Description	Part No.
1.	4 Port Protection (Fail-Over Switch) 19" Shelf 1U High Mount Version 110/120 V AC, 50/60 Hz power	VCL-T1-PRO-1421

