


# VALIANT COMMUNICATIONS LIMITED



## VCL - 8 E1 + Ethernet PDH Optical Multiplexer

### Product Brochure & Data Sheet

#### INDIA

##### Valiant Communications Limited

71/1, Shivaji Marg, New Delhi - 110015, India  
**Phone:** +91-11 4105 5601, +91-11 4105 5602,  
+91-11 4105 5603, +91-11 2592 8415,  
**Fax:** +91-11 4105 5604, +91-11 2543 4300  
**E-mail:** [getinfo@valiantcom.com](mailto:getinfo@valiantcom.com)  
**Website:** <http://www.valiantcom.com>

#### U.S.A.

##### Valiant Communications & Technologies Inc.

4000 Ponce de Leon, Suite 470  
Coral Gables, FL 33146  
United States of America  
**E-mail:** [fl@valiantcom.com](mailto:fl@valiantcom.com)  
**Website:** <http://www.valiantcom.com>

#### U.K.

##### Valiant Communications (UK) Ltd

1, Acton Hill Mews, 310-328 Uxbridge Road,  
London W3 9QN  
United Kingdom  
**E-mail:** [uk@valiantcom.com](mailto:uk@valiantcom.com)  
**Website:** <http://www.valiantcom.com>

## Product Description

VCL - 8 E1 + Ethernet PDH Optical Multiplexer is a high performance optical line transmission equipment, combines 8, ITU-T G.703 compliant standard electrical E1s **plus** 100BaseT ethernet signal into an optical data stream for transport over fiber optic pairs. Several transmitter options for different cable types and wave-lengths are available. 1+1 optical path redundancy is offered and available as an option.

### VCL - 8 E1 + Ethernet PDH Optical Multiplexer




Front View

## Features and Highlights

- Integrated E1 Plus Ethernet Optical Multiplexer
- Compact design that performs E1 and Ethernet channel multiplexing & de-multiplexing to an optical output
- Provides visible and audible alarm indication
- Provide Remote power detection (RPD)
- Low power consumption
- Orderwire (EOW) channel for end to end installation and maintenance
- Local and remote loop back test for diagnostics
- 1+1 Fiber Path protection
- ALS (Auto Laser Shutdown) facility for eye safety.
- 10/100M Ethernet Port - 100 Mbps Ethernet data transmission rate complies with IEEE 802.3
- Supports auto negotiation and flow control (pause)
- Clock options: internal/loop-timed
- Provides visible and audible alarm indications
- Local & remote loopback controls for diagnostics and troubleshooting
- Local configuration management through RS232 Serial Port
- Provide a customer RS232 transparent data channel upto 115.2 Kbps
- Remote configuration and management through 10/100BaseT Ethernet Port - Telnet (english text commands)
- SNMP (V1 and V2C)

### Application Diagram VCL - 8 E1 + Ethernet PDH Optical Multiplexerr

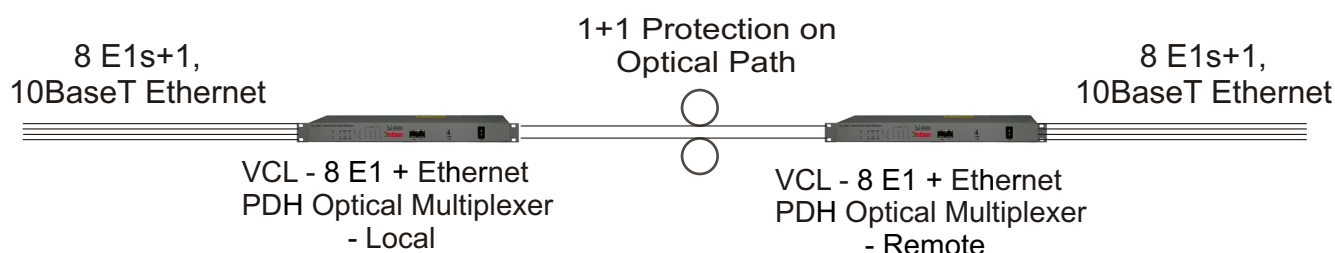

## Technical Specifications

Electrical Interface	E1
Channel capacity	Upto 8E1
Bit rate	2.048 Mbps $\pm$ 50 ppm
Line code	HDB3
Frame Structure	As per G.704
Electrical Interface	As per G.703
Nominal impedance	120 $\Omega$ balanced / 75 $\Omega$ unbalanced (optional)
Jitter character	ITU-T G.742, G.823 compliant
Connectors	RJ-45 connectors (120 $\Omega$ balanced) or Male DB37 interface with BNC coaxial connectors (75 $\Omega$ unbalanced)

## Optical

Type of Transmitter	Class 1 Laser
Transmitter power	$\geq$ - 3dBm, $\geq$ - 6dBm, $\geq$ - 9dBm options, as ordered
Bit rate	155 Mbps
Wavelength	1310/1550nm (optional)
Optical connector	FC/PC
Receiver Sensitivity	$\leq$ - 36 dBm
Typical output power	$\geq$ -9dBm
Fully Compliant with ITU-T G.957, G.958 Specification	
Class 1 Laser Product, Compliant with IEC 60825-1	
Compliant with Telcordia (Bellcore) GR-468-CORE	

## Safety

Class 1 Laser
Auto Laser Shut Down in the event of fiber break.

## Ethernet Interface

### 10/100BaseT (optional)

Number of Interfaces	1
Interface	RJ45 Ethernet 10BaseT or 100BaseT-TX (auto sensing)
Compliance	Ethernet Version 2.0 IEEE802.3 10Base-T & 100Base-TX Activity, Full/half duplex.
Interface Rate	100 Mbps Ethernet data transmission rate
Connector	RJ-45

## Configuration, Management and Alarms

Serial Management Port - RS232 interface
10/100 BaseT for Remote Management over a LAN
10/100 BaseT Telnet over a TCP-IP Network
SNMP V2

## Power Supply

Power Input	AC, DC, AC + DC
DC power	DC - 48V(-36~-72V) / DC 24V optional
AC power	AC 220V (185~265V)
Power consumption	18 Watts maximum

## Environment

Temperature	- 5°C ~ +55°C for operation - 40°C to +70°C for storage
Humidity	5% to 95% (35°C)

## Physical

Width	440 mm
Depth	202 mm
Height	43.5 mm
Weight	2 kg.
Rack Type	EIA 19-Inch

## Ordering Information

S. No.	Product Description	Part No.
1.	VCL-8 E1 + Ethernet PDH Optical Multiplexer - AC	2081:1-8E1-ETH-AC
2.	VCL-8 E1 + Ethernet PDH Optical Multiplexer - DC	2081:1-8E1-ETH-DC

Technical specifications are subject to changes without notice.  
 All brand name and trademarks are the property of their respective owners.  
 Revision 04 - April 05, 2009

### INDIA

#### Valiant Communications Limited

71/1, Shivaji Marg, New Delhi - 110015, India  
**Phone:** +91-11 4105 5601, +91-11 4105 5602,  
 +91-11 4105 5603, +91-11 2592 8415,  
**Fax:** +91-11 4105 5604, +91-11 2543 4300  
**E-mail:** [getinfo@valiantcom.com](mailto:getinfo@valiantcom.com)  
**Website:** <http://www.valiantcom.com>

### U.S.A.

#### Valiant Communications & Technologies Inc.

4000 Ponce de Leon, Suite 470  
 Coral Gables, FL 33146  
 United States of America  
**E-mail:** [fl@valiantcom.com](mailto:fl@valiantcom.com)  
**Website:** <http://www.valiantcom.com>

### U.K.

#### Valiant Communications (UK) Ltd

1, Acton Hill Mews, 310-328 Uxbridge Road,  
 London W3 9QN  
 United Kingdom  
**E-mail:** [uk@valiantcom.com](mailto:uk@valiantcom.com)  
**Website:** <http://www.valiantcom.com>