

VCL-EC[™] Voice Quality Enhancement (VQE) & T1 Echo Canceller

8 x VQE & T1 Echo Canceller per Chassis

Product Brochure & Data Sheet

U.K.

Valiant Communications (UK) Ltd Central House Rear Office 124 High Street, Hampton Hill Middlesex, TW12 1NS, U.K.

E-mail: gb@valiantcom.com

U.S.A.

Valcomm Technologies Inc. 4000 Ponce de Leon, Suite 470 Coral Gables, FL 33146 U.S.A.

E-mail: us@valiantcom.com

INDIA

Valiant Communications Limited 71/1, Shivaji Marg, New Delhi - 110015, India

E-mail: mail@valiantcom.com

Product Overview

Valiant offers the industry's most compact 8xT1 voice quality enhancement (VQE) and echo canceller solution in a 19-inch, 1U (44mm height) chassis, with echo tail-displacement (echo tail offset) feature which is user programmable from 0ms. to 512 ms. Echo cancellation on each channel is 128 ms. bidirectional (near-end and far-end) echo cancellation.

The 8xT1 VQE and echo canceller solution offers a unique, user definable echo-tail displacement feature which may be programmed by the user, between 0ms. to 512ms. on the return path to cancel echo-tails, both at the near-end and the farend, in the most demanding network conditions. E1 version of VQE and echo cancellers are also offered and available.

Valiant offers echo cancellation and voice quality enhancement solutions for the following network situations:

- Wireline
- International Gateway
- IP Gateway
- Wireless
- Satellite

This solution is also an ideal echo cancellation solution for long distance telephony, GSM, CDMA, TDMA, VoIP, satellite and radio communication applications.

The VQE and echo canceller equipment is compliant to ITU-T G.168 (2000/2002) requirements for echo cancellation. The echo canceller solution offers carrier-grade voice quality per AT&T Voice Quality Assessment Lab. Echo cancellation on each channel is 128 ms. Bidirectional.

Type of VQE and T1 Echo Canceller offered

8 x Voice Quality Enhancement (VQE) T1 Echo Cancellers 19 inch, 1U (44mm) chassis, 128ms. bidirectional echo cancellation tail. T1 inputs and outputs are balanced 100 Ohms, RJ-45.



Key Highlights

Valiant offers the industry's most compact 8 x Voice Quality Enhancement (VQE) & T1 Echo Cancellers solution.

- 128 ms. bidirectional (near-end and far-end) echo cancellation with echo-tail displacement (tail-offset) from 0ms. to 512 ms.
- Programmable echo-tail displacement (echo tail off-set) from 0ms. to 512 ms.
- Echo-Tail Displacement allows user to program a delay off-set on return path and the user can cancel near-end and far-end echo from single installation.
- Ideally suited for GSM Networks to eliminate "back ground noise" to enable GSM Networks to function at half-rate (HR) (with full-rate voice quality) thereby doubling spectrum usage in GSM networks.
- Echo cancellation on each channel is 128 ms. bidirectional (near-end and far-end).
- Compliant to ITU-T G.164, G.165, G.168 (2000/2002) recommendations.
- Electrical echo cancellation resulting from networks delays and delays arising due to complex voice compression algorithms in hybrid PSTN and long distance networks.
- Acoustic Echo Cancellation required for mobile networks for cancelling echo-tails that originate from cellular hand-sets, designed with poorly designed acoustic feedback.
- Auto Voice Level Control and VQE (Voice Quality Enhancement features) required for reducing background noise from calls originating from crowded public places or other noisy environments and maintaining a uniform voice level in a Network. Improves voice quality
- User programmable dedicated data channels
- Remote access through Telnet
- 8 x T1 (or E1) VQE and echo cancellers in a 1 U (44mm) high chassis - industry's smallest foot print.
- User Programmable signaling options:
- PRI ISDN (23B+D), C7, SS7, CCS, (C6, C7), RBS (E&M, PLR, FXS,-GS, FXO-GS, FXS-LS, FXO-LS

Question: What is echo tail-displacement (echo tail off-set)?

Answer: Echo tail-displacement (echo tail off-set) is an important feature used in bidirectional echo cancellation, to make it effective and useful for bidirectional echo cancellation.

Explanation: Bidirectional (defined as near-end and far-end automatic echo cancellation operation) echo cancellers have the capability of cancelling echoes in both directions (on the Transmit as well as the Receive paths), by installing them at a single location. Bidirectional echo cancellers can be installed at a single location, either the near-end or the far-end, and used to cancel both near-end and far-end echo-tails, from a single installation.

Usually, satellite links and intercontinental VoIP circuits have fixed network delays which exceed the capabilities of commonly available (192 ms.) echo cancellers for bidirectional echo cancellation, thus making them unsuitable for bidirectional echo cancellation.

Example: An inter-continental satellite or a VoIP link may have a fixed end-to-end round-trip delay of 300ms., thereby rendering all commonly available echo cancellers, with even 192 ms. echo cancellation capabilities, in-effective for bidirectional echo cancellation.

Using the Echo Tail-Displacement (echo tail off-set) feature, the user may off-set and account for the fixed round-trip network delay on the return path so that the echo cancellation window on the return-path is shifted (off-set) by 300 ms., so as to allow the bidirectional echo canceller to function effectively in both directions and to cancel both near-end, as well as the far-end echo-tails on the return path, even if the echo canceller is installed at the near-end in a given network.

Echo Tail-Displacement (echo tail off-set) allows the user to program a delay off-set on the return path, so that the user may cancel both near-end and far-end echo-tail with a single Echo Canceller installation. The echo tail-displacement allows the user to compensate for the fixed network delays on the return path of the echo-tail, so that the user can effectively cancel, both near-end and far-end echoes using a single Echo Canceller without being limited by the fixed end-to-end delay of that network link.

Valiant's Echo canceller has a user programmable "echo tail-end displacement" (echo tail off-set) from 0 ms. to 512 ms.

This feature allows the use of a single echo canceller installation to cancel echo-tails in both directions over inter-continental satellite or VoIP links where the fixed network delays are excessive (beyond and in excess of (example) 192 ms. echo cancellation capability of the commonly sold bidirectional echo canceller solutions).

Question: My Network has a total of 300 ms. endto-end delay. How can I use a 128 ms. bidirectional echo canceller to cancel, both, nearend and far-end echoes?

Answer: The use of the "programmable echo tail-displacement" (echo tail off-set) feature in our echo cancellers allows the user to cancel echoes on the return path even if the network delays exceed 128 ms.

The fixed network delay shall be calculated, ascertained and programmed as the "echo tail-displacement" on the return path. This shall allow the user to use a single echo canceller to cancel echoes, bidirectionally, even if the total network end-to end delay is in excess of 300 ms.

The Valiant 128 ms., bidirectional echo canceller solution, equipped with a user programmable "echo tail-displacement" feature is superior than a simple single 192 ms. bidirectional echo canceller solution for cancelling both near-end and far-end echoes, even if the fixed round-trip network delays exceed 300 ms. (please see the example above).

Features and Highlights

- USER PROGRAMMABLE ECHO TAIL DISPLACEMENT (Echo tail off-set): User definable echo-tail displacement is selectable between 0ms. to 512ms. on the return-path. This feature allows the user to cancel echo-tails in both directions (both near-end and far-end echo tails), even in most demanding conditions that are common on VoIP networks and satellite links.
- USER PROGRAMMABLE SIGNALING OPTION:
 The T1 echo cancellers support the following signaling protocols: Signaling protocols supported:
 - 24B (24 Voice Channels) with out-of-band signaling
 - C7/SS7 Signaling on any user selected timeslot)
 - 23B+D, PRI ISDN (23 Voice Channels+D Signaling Channel)
 - D4 Robbed Bit Signaling.
 - CCS (C6,C7), RBS (E&M, PLR, FXS-GS, FXO-GS, FXS-LS, FXO-LS)
 - All signaling options are User Selectable/ User Programmable.
 - Allows digital data transmission on any individual user-selected time-slots
- The T1 Echo Canceller supports 2100 Hz fax/analog data modem tone detection and echo canceller disabling on all channels.
- USER PROGRAMMABLE DEDICATED DATA CHANNELS: The user may specify/define the dedicated data channels so that they are always and completely by-passed from the echo cancellation circuitry-leaving those specifically assigned dedicated time-slots for digital data transmission (including video transmission).
- Option for user to select voice echo cancellation or digital-data transmission selectively on each time-slot for selective echo cancellation. This feature allows the user to use selected time-slots for data transmission to enable digital data/CCS signaling transmission.
- Transmission (data mode), while keeping the echo cancellation "ON" on the remaining timeslots (voice mode), on which echo is required to be cancelled.
- Meets ITU-T G.168 (2000/2002) requirements for echo cancellation.
- Stratum 3e clock for stable Internal

- clock/holdover clock in the event of failure of any of the selected clock sources
- Provides voice echo cancellation of up to 128ms.
 bidirectional (near-end and far-end echo canceller) for 8 T1 ports
- Custom user definable echo-tail displacement (echo tail off-set) between 0ms. to 512ms. This allows the user to cancel echo in both directions (near-end and far end), even in most difficult conditions i.e. excessive transmission delays that are common on VoIP GSM, CDMA, networks and satellite links
- Voice Quality Enhancement:
 - Removes background noise
 - Automatic level control (maintains VF levels)
 - Acoustic Echo Control
 - Adaptive Listener Enhancement
- T1 link by-pass on power failure. This feature helps to maintain the link integrity event in the event of power failure
- The echo canceller supports fax/modem G.164 and G.165 (2100 Hz) tone disable
- User selected clock/synchronization option-Internal, External and Loop-Timed clock
- Remote access through telnet over LAN/TCP-IP link (10/100BaseT)
- Local access through COM port (RS232 serial port)
- Easy to use text based CLI commands for management and configuration
- Adjustable gain/loss settings on all channels.
 Provides the user the flexibility to adjust and optimize the voice, transmit and receive levels.
- Non-linear processor with comfort noise insertion
- Fully independent 8 T1 (or E1) echo canceller
- Remote Monitoring and Control:
 - Remote access through telnet over LAN/TCP-IP link (10/100BaseT)
 - Local access through COM port (RS232 serial port)
- Fault Recovery: The echo canceller equipment offers fault recovery feature. It offers automatic by-pass upon power-supply failure (i.e. it offers T1 circuit by-pass in the event of power supply failure).
- Ensures echo canceller maintains excellent performance at all times in presence of tones or signals including DTMF tones.

Applications

Applications

- Wireless: GSM, CDMA, TDMA and Cellular Base Stations
- Digital Circuit Multiplication Equipment (DCME)
 : Satellite Communications and Multiplexers
- PCS, mobile and digital cordless wireless systems
- PBX and central office systems
- Datacomm: Voice over Frame Relay, Voice over ATM and Voice over Internet
- Voice over ATM, Frame Relay or packet switching systems and fax transmissions
- Central Office and PBX: Network Trunks, Echo Canceller Pool, Common Equipment and Audio Conferencing Bridges
- Voice over Datacomm including Voice over Internet (VoIP), Voice over ATM (VoATM) and Voice over Frame Relay (VoFR)

Datacomm Applications

- Voice over Frame Relay
- Voice over ATM
- Voice over Internet/LAN

Satellite Communications Applications

Digital Circuit Multiplication Equipment

Wireless Applications

- GSM, CDMA
- Cellular Base Stations

Central Office and PBX Applications

- Network Trunks
- Echo Canceller Pool
- Common Equipment
- Audio Conferencing Bridges

Voice Over ATM Applications


 A multi-channel echo canceller resource or pool is shared among many channels to reduce cost Echo cancellation is done at a DSO level

Voice over Frame Relay, ATM Applications

- Frame Relay and ATM routers and switches introduce large, variable and unpredictable delays
- Echoes from the Public Switched Telephone Network (PSTN) in combination with the delays from Frame Relay and ATM equipment yield objectionable speech quality


Shelf Description:

The VCL-EC, 8 x VQE and T1 Echo Canceller is a 1U, 19 Inch Shelf, fitted with a back plane. The T1 interface, power input, alarm extension, COM Port, LAN and external clock are all accessed from the system front panel.

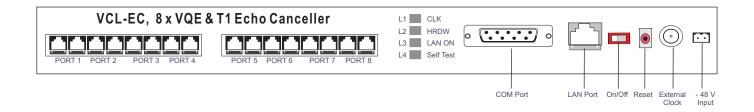

Applications Diagram

To cancel the echoes at both ends (near-end and far-end) of the Network with one 128ms. bidirectional Echo Canceller

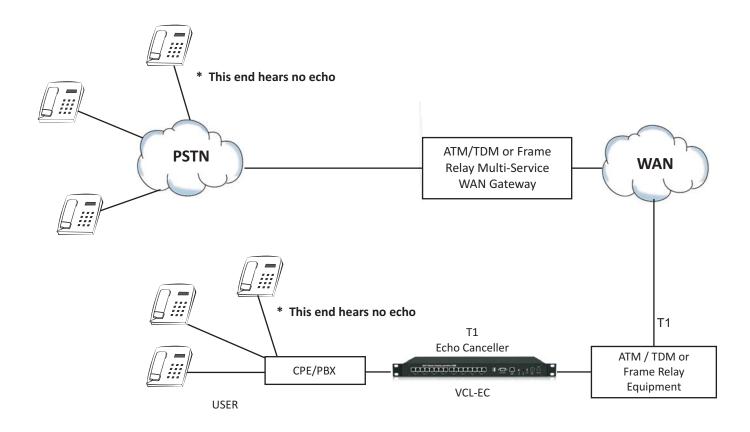

To cancel the echoes at both ends of the network with one 128ms. bidirectional Echo Canceller with user programable Echo Tail Displacement (Echo Tail Off-set) Features

Note: The VCL-EC[™] Echo Canceller offers User Programable Echo Tail Displacement feature, User Definable Echo Tail Displacement is selectable between 0ms. to 512ms. on the return-path. This feature allows the user to cancel echo-tails in BOTH directions (both near-end and far-end echo tails), even in most demanding conditions that are common on VoIP networks and satellite links.

Technical Specifications

Network Interface

Number of Interfaces	16, T1 Interfaces, 8-Input	
	(RJ-45), 8-Output (RJ-45)	
Line Rate	T1 - 1.544 Mbps	
Line Code	B8ZS, AMI (User Selectable)	
Framing Format	D4, ESF (User Selectable)	
	SF (D3/D4) per ITU-T G.733	
	ESF per AT&T Cb142	
Facility Protection	Metallic bypass relays for	
	failsafe operation in the	
	event of power supply	
	failure	
PCM Encoding Law	Law as per ITU-T G.711	
PCM Sampling Rate	8000 samples/sec.	
Signaling Protocols	Pass-Through: Signaling	
	protocols supported:	
	- 24B (24 Voice Channels)	
	with out-of-band	
	Signaling	
	- C7/SS7 Signaling on any	
	user selected time-slot	
	- 23B+D, PRI ISDN (23 voice	
	Channels+D signaling	
	Channel).	
	- D4 Robbed Bit Signaling	
	- CCS (C6,C7), RBS (E&M,	
	PLR, FXS-GS, FXO-GS,	
	FXS-LS, FXO-LS)	
	- All signaling options are	
	User Selectable	
Bit Rate	1544 Kbps ± 130 ppm	
Jitter Tolerance	As per ITU-T G.823	
Output Jitter	< 0.05 UI (in the frequency	
	range of 20Hz to 100 Khz)	
Nominal Line	100 Ohms Balanced RJ 45	
Impedance	100 Ommo Baraneca no 10	
Nominal Pulse Width	244 ns	
Pulse Mask	As per ITU (CCITT) Rec.	
Tuise Wask	G.703	
Loss and recovery of	As per clause 3 of ITU	
frame alignment	(CCITT) G.732	
Loss and recovery of	As per clause 5.2 of ITU	
multiframe	(CCITT) G.732 Alignment	
	-	

Power Consumption

Input Voltage	Current	Power
= -48 VDC	(in Amps.)	Consumption (in Watts)
1 Unit	0.15	6.0

Power Supply Specifications

-48V DC (nominal)
-40V to -60V DC
+3.3V
4A at +3.3V
Provided in the card
> 4A for +3.3V
Current limit - 4A. Recovers
on removal of short
< 2.9V
3.7V
>86%
<5mVrms
<50mV

Echo Cancellation

Up to 128ms. Bidirectional	
(near-end and far-end)	
As per ITU-T G.164, G.165	
>35 dB (with 6dB ERL)	
at - 10 dBm0	
>65 dB with NLP enabled	
Selectable Threshold Levels Options: 0, 3, 6 dB	
Selectable Levels Options:	
Selectable Levels Options: -12, -9, -6, -3, 0, +3,+6,+9	
User Selectable –	
Enable/Disable	
RS232 serial interface for	
Management through a PC	
COM Port	
Ethernet (10BaseT)	
interface for remote LAN	
Management and Control	
CLI (text commands) and	
GUI	
- In SYNC/Failure	
- LEDs for power on/off	
0° C to 50° C	
5% to 95%, non-condensing	
Acoustic Echo Control (AEC)	
Adaptive Noise Reduction	
(ANR)	
Adapting Listener	
Enhancement (ALE)	
Automatic Level Control	
(ALC) G.169	

Technical Specifications

Management Port Specifications 10BaseT LAN Management Port (with Telnet)

Network Interface	RJ-45 Ethernet 10BaseT or
	100 BaseT-TX (auto sensing)
Compatibility	Ethernet Version 2.0
	IEEE802.3
Protocols Supported	ARP, UDP/IP, TCP/IP, Telnet,
	ICMP, SNMP, DHCP, BOOTP,
	TFTP, Auto IP, SMTP and
	НТТР
LEDs	10Base-T & 100Base-TX
	Activity, Full/half duplex
Management	Serial login, Telnet login, GUI
EMI Compliance	- Radiated & conducted
	emissions - complies with
	Class B limits of
	EN55022:1998
	- Direct & Indirect ESD -
	complies with
	EN55024:1998
	- RF Electromagnetic Field
	Immunity - complies with
	EN55024:1998
	- Electrical Fast
	Transient/Burst Immunity
	- complies with
	EN55024:1998
	- Power Frequency
	Magnetic Field Immunity -
	complies with
	EN55024:1998
	- RF Common Mode
	Conducted Susceptibility -
	complies with
	EN55024:1998

Mechanical Specifications

Rack Mounting	Standard 19 Inch. DIN
	Rack
Height	44.00 mm.
Depth	260.00 mm.
Width	477.00 mm.
Weight	4.00 Kg. (8 xVQE & T1
	Echo Cancellers per
	Chassis)

Clock

Internal	(Stratum 3 level)
Loop-timed	Port A / Port B
	(User Selectable)

Compliance/Regulatory

- EMC FCC Part 15 Class 2
- Operation ETS 300 019 Class 3.2
- Storage ETS 300 019 Class 1.2
- Transportation ETS 300 019 Class 2.3
- CE

Ordering Information

Product Description	Part#	
VCL EC [™] 8 x VQE & T1 Echo Cancellers	VCL-EC-T1-8	
Per Chassis		

Technical specifications are subject to changes without notice. All brand name and trademarks are the property of their respective owners. Revision 09 - September 17, 2018

U.K.

Valiant Communications (UK) Ltd Central House Rear Office 124 High Street, Hampton Hill Middlesex, TW12 1NS, U.K.

E-mail: gb@valiantcom.com

U.S.A.

Valcomm Technologies Inc. 4000 Ponce de Leon, Suite 470 Coral Gables, FL 33146 U.S.A.

E-mail: us@valiantcom.com

INDIA

Valiant Communications Limited 71/1, Shivaji Marg, New Delhi - 110015, India

E-mail: mail@valiantcom.com